


# MV SERIES / 292mm

EN 779 EFFICIENCY: M6-F9  
 MEDIA : Micro Glass Fibre  
 SEPARATORS: Hotmelt  
 FRAME: High Impact Polystyrene  
 GASKET: Two component, continuous polyurethane  
 FINAL PRESSURE DROP: 600 Pascals  
 OPERATING TEMPERATURE: 80 °C

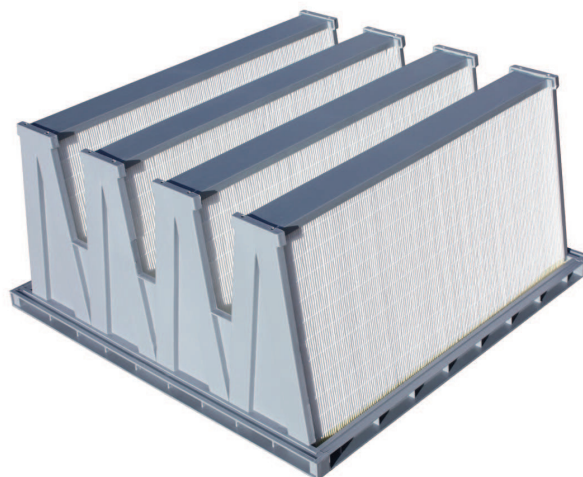

## MICROFIL V FILTERS

Part Number	Filter Class (EN 779)	Width (mm)	Height (mm)	Depth (mm)	Media Area (m <sup>2</sup> )	Air Flow (m <sup>3</sup> /h)	Pressure drop (Pascals)	Energy Rating
<b>M6</b> ▶								
MV-M6-01	M6	592	292	292	8,5	2125	100	C
MV-M6-02	M6	592	492	292	15	3500	100	C
MV-M6-03	M6	592	592	292	18	4250	100	C
<b>F7</b> ▶								
MV-F7-01	F7	592	292	292	8,5	2125	115	B
MV-F7-02	F7	592	492	292	15	3500	115	B
MV-F7-03	F7	592	592	292	18	4250	115	B
<b>F8</b> ▶								
MV-F8-01	F8	592	292	292	8,5	2125	125	A
MV-F8-02	F8	592	492	292	15	3500	125	A
MV-F8-03	F8	592	592	292	18	4250	125	A
<b>F9</b> ▶								
MV-F9-01	F9	592	292	292	8,5	2125	155	A
MV-F9-02	F9	592	492	292	15	3500	155	A
MV-F9-03	F9	592	592	292	18	4250	155	A